

10 L HYDRAULIC COMPENSATOR

With or without sensor


The function of the compensator is to maintain a raised pressure in a fluid circuit related to ambient at all water depths.

This is achieved by a spring acting on a rolling diaphragm, i.e. the connected fluid circuit will always see a pressure equal to ambient sea water pressure plus the pressure generated by the spring.

Use of rolling diaphragm instead of piston is a great advantage to reduce hysteresis in the compensation system.

The compensator is provided with an interface that allows easy installation and stacking. Optional analog volume sensor is available. Even without volume sensor, the oil level can be visually read through slots in the spring housing.

10 L COMPENSATOR	WITHOUT SENSOR	WITH SENSOR
Manufacturer	KYSTDESIGN AS	
Product No.	101298	101239
Model Code	AF44-2000	AF44-2000
Capacity	9,5 Liter	
Pressure	0,25 - 0,35 Bar	
Hydraulic Connection	4x 3/4" BSPP or Custom Manifold Plate	
Length	467 mm	582 mm at full stroke
Width	Ø296 mm	
Weight in air	19 kg	20 kg
Depth rate	Full ocean depth	3000 m Option 6000 m
Mechanical interface	Fastening to external structure by using clamps around the cylindrical part. Clamps can be supplied on request.	

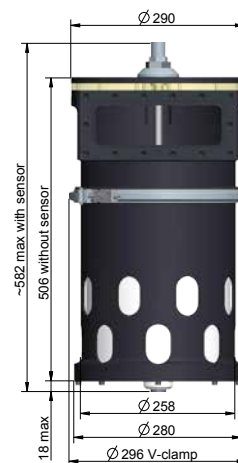

KYSTDESIGN AS

Eikeskogvegen 80 - 5570 Aksdal, Norway
post@kystdesign.no - Phone: +47 52.70 62 50

www.kystdesign.no

