

16 L HYDRAULIC COMPENSATOR

With or without sensor


The function of the compensator is to maintain a raised pressure in a fluid circuit related to ambient at all water depths.

This is achieved by a spring acting on a rolling diaphragm, i.e. the connected fluid circuit will always see a pressure equal to ambient sea water pressure plus the pressure generated by the spring.

Use of rolling diaphragm instead of piston is a great advantage to reduce hysteresis in the compensation system.

The compensator is provided with an interface that allows easy installation and stacking. Optional analog volume sensor is available. Even without volume sensor, the oil level can be visually read through slots in the spring housing.

16 L COMPENSATOR	WITHOUT SENSOR	WITH SENSOR
Manufacturer	KYSTDESIGN AS	
Product No.	100168	100172
Model Code	AB25	AB25
Capacity	15,8 Liter	
Pressure	0,15 - 0,25 Bar	
Hydraulic Connection	4x 3/4" BSPP or Custom Manifold Plate	
Lenght	472 mm	588 mm at full stroke
Widht	Ø366 mm	
Weight in air	24,00 kg	25,00 kg
Depth rate	Full ocean depth	3000 m Option 6000 m
Mechanical interface	Fastening to external structure by using clamps around the cylindrical part. Clamps can be supplied on request.	

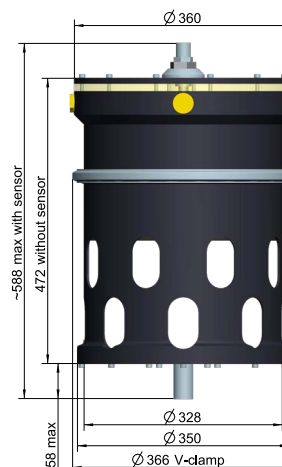

Customised Manifold Plate with a wide range of connection ports on stock



KYSTDESIGN AS

Eikeskogvegen 80 - 5570 Akksdal, Norway
post@kystdesign.no - Phone: +47 52 70 62 50

www.kystdesign.no